



COLOR SWATCHES  
detailed item info on back



White



Bone



Taupe



Montrose Park



Potomac River



Foggy Bottom



Potomac River


*There's something iconic and comforting about well executed masonry. Like its namesake neighbourhood in DC, our Georgetown Collection takes the feel of brickwork to a fresh & modern level.*

*Our new format of 4mm slim, fused glass brings all the style and functionality of our traditional glass material to a new budget conscious project type.*

*Unlike most of the competitive slim glass product, Georgetown retains all of the cutting edge embellishments like texture, metallics and sandblasting. Just like artisan brick mason's work, Georgetown imparts more style & flavor than you'd expect.*

## INSTALLATION & MAINTENANCE

- ◆ Product is clear float glass with a glazed rear face. Due to the clear nature of the material some "shadows" may be visible at tile edge when viewed at an angle. This is not a manufacturing defect
- ◆ Inspect all product prior to installation for any visible defects or unacceptable color/shade variation. Claims are not accepted after installation
- ◆ Install using polymer or latex modified thin set mortars. Do NOT install using mastic and/or epoxy. Flattening trowel ridges is critical with slim glass
- ◆ Suggested grout width is 2mm
- ◆ For best results cutting, use a score & snap glass/tile cutter with a new cutting wheel. If necessary use a wet saw or angle grinder with a blade specifically designed to cut glass
- ◆ After cutting, smooth any rough or sharp edges with a diamond honing stone or pad
- ◆ Before grouting follow mortar manufacturer's instructions to allow for full cure of thin set - usually 36 to 48 hours
- ◆ Grout only with non-sanded cementitious grouts. Using a sanded grout may scratch some surfaces
- ◆ After initial wash ensure all remaining "grout haze" is buffed off with a dry cloth before 24 hours have elapsed
- ◆ To clean use a damp sponge with warm water. For heavy cleaning use a non-abrasive cleaner with a damp sponge.

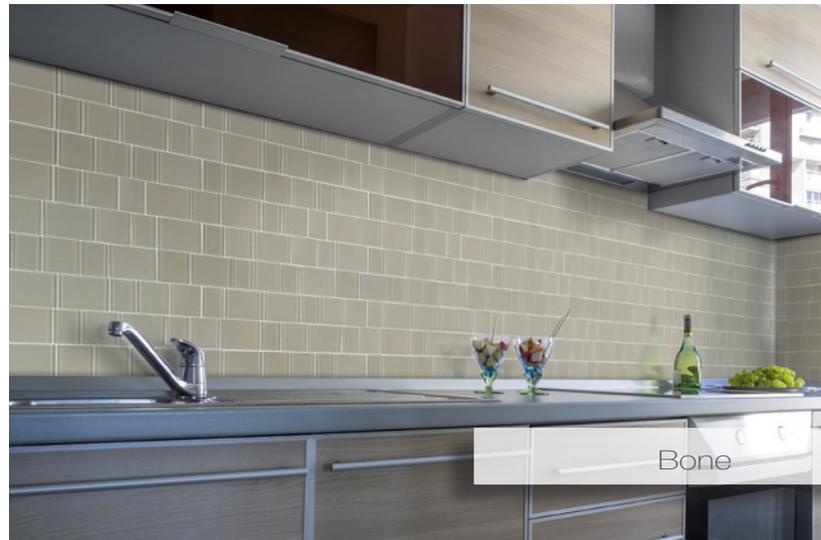


## TECHNICAL SPECIFICATIONS

Technical Characteristics	ASTM Test Result	ASTM/ANSI Test Method
Water Absorption %	0%	A 187.1
Frost Resistance	Pass	C1026
Chemical Resistance	Highly Resistant	C650
Scratch Resistance	5.5	MOHS

## PACKAGING


Size	PC/CTN	Sqft/ctn (Sqm/ctn)	Carton/Pallet	Sqft/plt (Sqm/plt)	Lbs/ctn (Kgs/ctn)	Lbs/plt (Kgs/plt)
12.5x13" (304x328)	22	22.07 (2.05)	45	992.95 (92.25)	38.58 (17.50)	1,736.14 (787.50)



# V1- V2

Minimal to Moderate Variation

### WHITE




GEORWH

### BONE




GEORBO

### TAUPE



GEORTA

### MONTROSE PARK



GEORMPB

### POTOMAC RIVER



GEORPRB

### FOGGY BOTTOM



GEORFBB

