


COLOR SWATCHES
detailed item info on back



Eggshell




Crema

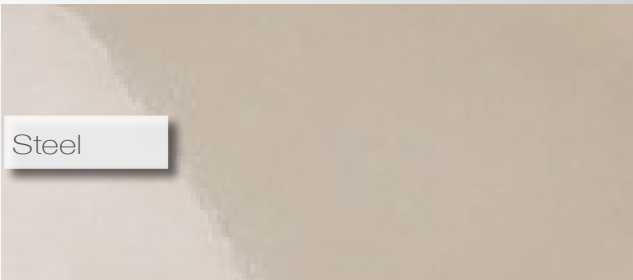

Steel



Smoke

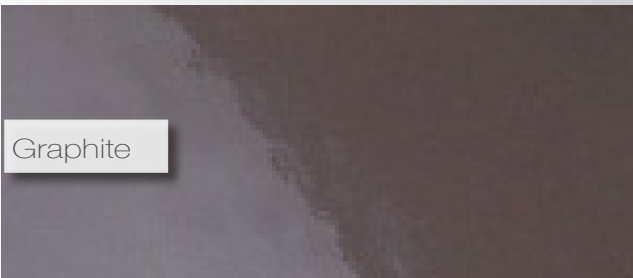

Graphite



Steel Bevel In & Out

Hexagonal mosaics have been a mainstay design material for over a century. As the name implies, our Novahex Collection breathes new life into this timeless design with a larger, stretched shape & rich dynamic colors.

Available In 5 colors and 3 solid formats - flat surface as well as the contrasting bevel - in and bevel - out, Novahex Provides nearly infinite possibilities for the unique expression of your own style. The addition of a 4th style that is a blend of all the others helps when you just can't decide which you like best!

Take your next design to a new place with Nova Hex mosaics as an accent or full feature installation.

INSTALLATION & MAINTENANCE

- ◆ Ceramic wall tile mosaic is suitable for all interior wall or ceiling applications including wet areas. Not suitable for demanding environments such as steam showers
- ◆ All products should be inspected prior to installation for any defects or unacceptable color/shade variation. Claims will not be accepted after installation
- ◆ Proper substrates, preparation and installation materials are required for a successful installation. For reference please see the TCNA 09300 Tile Handbook
- ◆ Non sanded grouts are recommended for high gloss wall tile mosaics
- ◆ Ensure all grout haze is buffed off before 48 hours have elapsed after installation
- ◆ Glazed mosaics should not be treated with a sealer for any reason
- ◆ To clean glazed ceramic wall tile mosaic, use a damp sponge with warm water. For heavy cleaning, use a non abrasive cleaner with a damp sponge
- ◆ Further warranty, best practices, care and maintenance details can be found on our website




Graphite Bevel In

TECHNICAL SPECIFICATIONS

| Technical Characteristics | ASTM Test Result | ASTM/ANSI Test Method |
|--|---------------------------|---------------------------------|
| Water Absorption % | ≥10% | A 187.1 |
| Dimensionality (flatness, warpage, straightness, etc.) | premium grade conformance | A 187.1 ISO 10545-2 |
| Thermal Shock & Cracking Resistance | Pass | A 187.1 ISO 10545-9/11 |
| Resistance to Stains, chemicals acids, etc. | Pass | C650 & C1378 ISO 10545-13/14 |

PACKAGING

| Size | PC/CTN | Sqft/ctn (Sqm/ctn) | Carton/Pallet | Sqft/plit (Sqm/plit) | Lbs/ctn (Kgs/ctn) | Lbs/plit (Kgs/plit) |
|----------------------|--------|--------------------|---------------|----------------------|-------------------|---------------------|
| 12.5x15.5" (320x395) | 13 | 13.56 (1.26) | 42 | 569.52 (52.92) | 47.30 (21.50) | 1987.00 (903.00) |
| 12.5x15.5" (320x395) | 13 | 13.56 (1.26) | 42 | 569.52 (52.92) | 47.30 (21.50) | 1987.00 (903.00) |
| 12.5x15.5" (320x395) | 13 | 13.56 (1.26) | 42 | 569.52 (52.92) | 47.30 (21.50) | 1987.00 (903.00) |
| 12.5x15.5" (320x395) | 13 | 13.56 (1.26) | 42 | 569.52 (52.92) | 47.30 (21.50) | 1987.00 (903.00) |



V1

Minimal Variation



Pencil Bullnose
1/3 x 8"
8x202mm



Quarter Round
1/2 x 8"
8x202mm

Eggshell



Flat - NOEGF



Bevel In - NOEGBI



Bevel Out - NOEGBO



Mix - NOEGMIX


Crema



Flat - NOCRF



Bevel In - NOCRBI



Bevel Out - NOCRBO



Mix - NOCRMIX

Steel



Flat - NOSTF



Bevel In - NOSTBI



Bevel Out - NOSTBO




Mix - NOSTMIX

Smoke



Flat - NOSMF



Bevel In - NOSMBI




Bevel Out - NOSMBO




Mix - NOSMIX

Graphite



Flat - NOGRF



Bevel In - NOGRBI



Bevel Out - NOGRBO



NOGRMIX

